



BLUEZONE PERIMETER SEALANT TAPE

Product Data Sheet

The Future of Perimeter Sealing

Constructed from high-grade 6 mil polyethylene and a permanently tacky rubber adhesive, BlueZone outperforms traditional caulking methods. BlueZone applied around the perimeter of flooring installations will effectively seal the expansion area, preventing spills from damaging both the flooring and subfloor.

The ease of use encourages proper perimeter sealing, keeping your floor and subfloor safe for the life of the flooring with proven moisture-proofing technology against liquids, including pet urine.

BlueZone has been proven to be more effective than the standard silicone/backer rod process. Offering a lower cost and more consistent, easier application. Choose BlueZone for a reliable, efficient, and long-lasting flooring protection solution.

- *Easy, clean application*
- *No special tools needed*
- *Excellent low-temperature adherence*
- *Great tear resistance. Nails slide through without damage*
- *Prevents moisture intrusion into floor expansion areas*
- *Moisture protection at a fraction of the cost of other methods*
- *Permanently tacky adhesive bonds well to most surfaces*



- The Past -
The Silicone Method



- The Future -
The Tape Method

Perimeter Sealing Locations

Bluezone can be used throughout the perimeter and is compatible with a wide range of molding




Wall Trims



Reducers



T-Molding

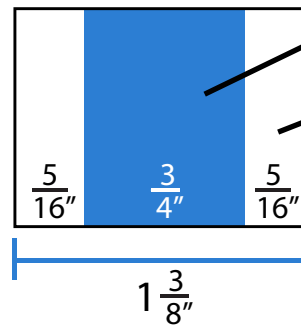


Non-Adhesive BlueZone


- *Covers expansion space*

Sealing Adhesive

- *Applies to all flooring types*
- *Adheres to most wall types*
- *Applies to most molding tracks*

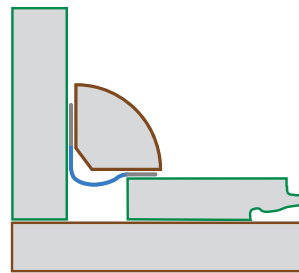

BlueZone Perimeter Sealant Tape TA82350			
	Units	Dimensions	Weight
Carton	1	1.7"x4.75"x6.25"	0.26 lbs
Case	12	10"x5"x10"	3.12 lbs
Master Case	144	22"x18"x22"	38 lbs
Pallet	1152	Standard	340 lbs
UPC Barcode #		0 50462 82350 1	
Case Barcode #		200 50462 82350 5	
Mastercase ITF-14		300 50462 82350 2	

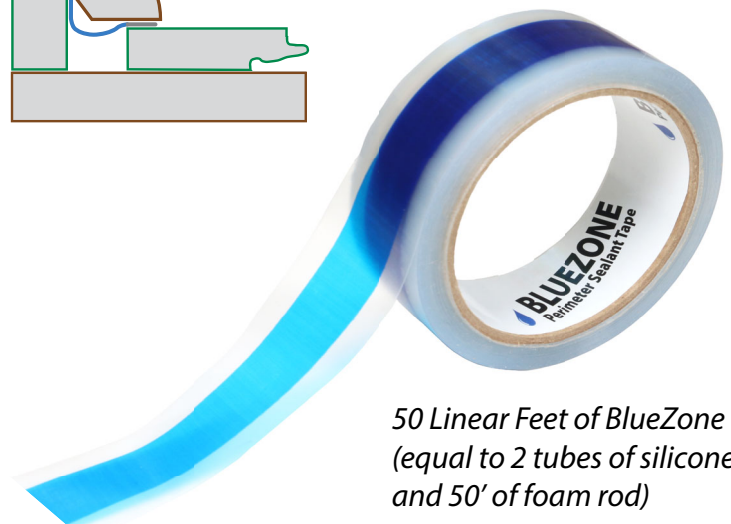

50 Linear Feet of BlueZone
(equal to 2 tubes of silicone
and 50' of foam rod)

